

01-14-00

A

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE

NEW YORK, NEW YORK 10151

TEL: (212) 588-0800

FAX: (212) 588-0500

Date: January 13, 2000Attorney Docket No.: 450117-02372

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office
of an application for patent in the name(s) of:

Besma KRAIEM

entitled:

QUASI-DIFFERENTIAL MODULATION/DEMODULATION METHOD FOR MULTI-AMPLITUDE DIGITAL
MODULATED SIGNALS AND OFDM SYSTEM

The following are enclosed:

- ☒ Specification (12 pages)
☒ 9 Sheet(s) of Drawings
☒ 15 Claim(s) (including 2 independent claim(s))
 ___ This application contains a multiple dependent claim

- ☒ Our check for \$ 690.00, calculated on the basis of the claims as
amended by any enclosed preliminary amendment as follows:

Basic Fee, \$690.00 (\$345.00)	\$ 690.00
Number of Claims in excess of 20 at \$18.00 (\$9.00) each:	-0-
Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each:	-0-
Multiple Dependent Claim Fee at \$260.00 (\$130.00)	-0-
Total Filing Fee	\$ 690.00
Assignment Recording Fee \$40.00	-0-

- ☒ Oath or Declaration and Power of Attorney

☒ New ☒ signed ☒ unsigned
 ___ Copy from a prior application (37 C.F.R. 1.63(d))

- ___ Certified copy of each of the following application(s) to substantiate
the claim(s) for priority made in the Declaration:

Application No.FiledInPlease charge any additional fees required for the filing of this
application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicant

William S. Frommer
 By: William S. Frommer
 William S. Frommer
 Reg. No. 25,506

1c675 U.S. PTO

09/482769

01/13/00

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE NEW YORK, NEW YORK 10151

WILLIAM S. FROMMER
WILLIAM F. LAWRENCE
EDGAR H. HAUG
MATTHEW K. RYAN
BARRY S. WHITE
THOMAS J. KOWALSKI
JOHN R. LANE
DENNIS M. SMID*
DANIEL C. BROWN
BARBARA Z. MORRISSEY
STEVEN M. AMUNDSON
MARILYN MATTHEW BROGAN
JAMES K. STRONSKI

A. THOMAS S. SAFFORD
JEROME ROSENSTOCK
RAYMOND R. WITTEKIND, PH.D.

Of Counsel

to

GORDON KESSLER
MARK W. RUSSELL*
RUBINO POLITO
CELA L. PAN*
JEFFREY A. HOYDEN
JOE H. SHALLENBURGER
CHRISTIAN M. SMOLIZZA
GLENN F. SAVIT
ROBERT E. COLLETTI
DEXTER T. CHANG
PETER J. WAIBEL*
LINDSEY A. MOHLE
DEENA P. LEVY
*Admitted to a Bar
other than New York

11/10
11/12
11/13
11/14

January 13, 2000

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: U.S. Patent Application
Applicant: Besma KRAIEM
Our Ref.: 450117-02372

Dear Sir:

Enclosed are papers constituting the above patent application which is being filed under 37 C.F.R. 1.53 without a signed Declaration. Please accord a filing date and a serial number to such application and inform the undersigned thereof so that a signed Declaration and the surcharge required by 37 C.F.R. 1.16(e) may be duly filed.

Please address all correspondence to:

William S. Frommer, Esq.
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Respectfully,



William S. Frommer
Reg. No. 25,506
Attorney for Applicant
Enclosures

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Besma KRAIEM
Filed : Herewith
For : QUASI-DIFFERENTIAL MODULATION/DEMODULATION METHOD
FOR MULTI-AMPLITUDE DIGITAL MODULATED SIGNALS AND
OFDM SYSTEM

745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

EXPRESS MAIL

Mailing Label Number EL375194215US
Date of Deposit January 13, 2000
I hereby certify that this paper or fee is being
deposited with the United States Postal Service
"Express Mail Post Office to Addressee" Service
under 37 CFR 1.10 on the date indicated above and
is addressed to the Assistant Commissioner for
Patents, Washington, D.C. 20231.

Charles J. Dyer
(Typed or printed name of person
mailing paper or fee)

Charles J. Dyer
(Signature of person mailing paper or fee)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Before the issuance of the first Official Action,
please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend the claims as follows:

Claim 4, line 1, delete "at least one of the preceding
claims" and insert "--claim 1--;

Claim 13, line 1, delete "or 12";

Claim 14, line 1, delete "any one of the preceding
claims 10 to 13" and insert --claim 10--.


REMARKS

The claims have been amended to eliminate multiple
dependencies. The filing fee has been calculated based upon
these amendments to the claims.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicant

By:


William S. Frommer
Reg. No. 25,506
Tel. (212) 588-0800

PATENT
450117-02372

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220

Description

- 1 The invention relates to a modulation/demodulation method for multi-amplitude digital modulated signals with non-equidistant phases transmitted via an orthogonal frequency division multiplexing (OFDM) communication channel and also refers to an OFDM system for the transmission of
5 information by multi-amplitude digital modulated signals from a transmitter to a receiver via a radio channel.

Orthogonal frequency division multiplexing (OFDM) has gained increasing interest in wireless communication systems during the last years, in particular
10 for DAB (Digital Audio Broadcast) and DVB-T (Digital Video Broadcast Television). It has been considered for transmitting high data rate over frequency selective radio channels.

The principle of OFDM transmission technique is to devise an available
15 bandwidth into several subchannels with smaller bandwidths. Thus the symbol length increases and the inter symbol interference (ISI) is combated. On the other hand, each subchannel is considered to be frequency non-selective. The amplitude and phase distortion caused by multipath effects is accordingly described by one factor.

20 In coherent transmission systems that distortion is removed by channel estimation. For this purpose known symbols are sent on pilot subcarrier(s). On the receiver side the amount of channel distortion is processed from the received known symbols and is used to correct the rest of the data before
25 demodulation.

Channel estimation is not required, if differential modulation is used. The information is encoded in the ratio of successive symbols on the same subcarrier. Thus, the channel distortion is cancelled at the receiver, since it is
30 assumed to be constant during successive OFDM symbols.

However, differential modulation and demodulation have been only described for low-order single-amplitude modulation schemes, such as PSK (Phase-Shift Keying) and QPSK (Quadrature Phase-Shift Keying). As for a specific example, reference is made to document DE 195 40 250 C1 describing a demodulation

1 scheme based on the assumption that the demodulated complex symbols are
associated to respectively transmitted symbols via a rotational symmetric
constellation diagram so that approximative estimations for the phase-shift
lead to applications with reasonable results.

5

For multi-amplitude signals such as QAM (Quadrature Amplitude Modulation)
only coherent modulation is used, and thus channel estimation is always
required (see e.g. EP 0 734 132 A2).

10 It is an object of the present invention to teach a more simple modulation/
demodulation method and system for multi-amplitude digital modulated
signals with non-equidistant phases, in particular QAM signals transmitted via
an OFDM communication channel without the necessity of using pilot carriers.

15 According to the teaching and the characterizing features of claim 1, this
problem is solved with the idea that the amplitudes of said digital modulated
signals should be separately and coherently processed, whereas for the phases
of respectively subsequent symbols on the same subcarrier differential
modulation and demodulation is provided.

20

Advantageous details, improvements and embodiments are the subject of
dependent claims.

25 An orthogonal frequency division multiplexing (OFDM) system for the trans-
mission of information by multi-amplitude digital modulated signals from a
transmitter to a receiver via a radio channel in accordance with the invention
is the subject-matter of and defined in claim 9. Specific embodiments and
advantageous supplements and improvements are defined in further dependent
claims.

30

For a comprehensive explanation of the invention the following description is
divided in chapters.

35 In **Chapter I** the OFDM transmission model used for simulations and the
channel models are first described.

1 In **Chapter II** the simulation of coherent modulated 16 QAM is presented.

In **Chapter III** the principle of the combined coherent/differential (henceforward called quasi-differential) modulation for 16 QAM signals is
 5 described as well as the way it was implemented according to a best mode presently known.

In **Chapter IV** the simulation results of both techniques are compared in terms of BER (Bit Error Rate) performance in an AWGN (Additive White Gaussian
 10 Noise) channel and in a multipath channel.

Finally as a **Summary** a brief comparison of both systems with respect to implementation complexity will conclude the present description of the invention.

15 In the following description reference will be made to the accompanying drawings in which

Fig. 1
 20 is a block diagram of an OFDM system with features according to the invention;

Fig. 2 is a diagram of the BER performance of coherent 16 QAM signals in an AWGN channel and multipath channel,
 25 respectively;

Fig. 3 is a constellation diagram of 16 QAM symbols before and after phase-differential encoding;

30 **Fig. 4** depicts a block diagram implementation of a quasi-differential phase encoder (transmitter side);

Fig. 5 is a block diagram of the implementation of a quasi-differential phase decoder (receiver side);

35 **Fig. 6** shows a data frame structure as used for simulations;

- 1 **Fig. 7** is a diagram of the BER performance of quasi-differential 16 QAM signals in AWGN and multipath channels, respectively;
- 5 **Fig. 8** visualizes a diagram of a BER performance comparison of coherent and quasi-differential 16 QAM in an AWGN channel;
- Fig. 9** is the diagram of a BER performance comparison of coherent and quasi-differential 16 QAM signals in multipath channels; and
- 10 **Fig. 10** shows constellation diagrams of received QPSK and 16 QAM signals at different stages with an assumed SNR (Signal-to-Noise Ratio) of 35 dB wherein
- 15 - **Fig. 10A** visualizes received QPSK signals in a multipath channel;
- **Fig. 10B** is a plot of received 16 QAM signals in a multipath channel;
- 20 - **Fig. 10C** shows the stage of received QPSK signals after differential phase decoding;
- **Fig. 10D** is a Q/I plot of received 16 QAM signals after differential phase decoding;
- 25 - **Fig. 10E** depicts a plot of received QPSK signals after passing a hardlimiter on the receiver side; and
- 30 - **Fig. 10F** represents a Q/I plot of received 16 QAM signals after amplitude correction.

Chapter I: System Simulations

- 35 In order to evaluate both the coherent transmission scheme and the quasi-differential transmission scheme according to the invention in different environments a baseband simulation tool known under the tradename COSSAP

1 has been used.

The OFDM transmission model used for such simulations is shown in Fig. 1. Briefly, this OFDM system works as follows: The uncoded data stream is first
 5 modulated in 16 QAM symbols. Then $(N - N_{\text{sel}})$ virtual carriers (N = maximum carriers for FFT; N_{sel} = selected carriers) are inserted in the band edges of each OFDM symbol, since they are not used to transmit data. After IFFT (Inversed Fast Fourier Transformation) is processed, a guard interval is inserted at the beginning of each OFDM symbol, containing a copy of its last
 10 N_G samples (N_G = Samples of guard length).

The blocks of Fig. 1 and their respective function are briefly described in the following:

15 **Transmitter side (upper part of Fig. 1):**

	Reference Number:	Description and Function:
	1	Demultiplexer: The adopted frame structure consists of n QPSK symbols followed by m 16 QAM symbols. Thus $(n \cdot 2)$ bits are sent to the QPSK modulator 2, and $(m \cdot 4)$ bits are supplied to a 16 QAM modulator 3.
20		
25	2	QPSK Modulator: Mapping of 2 bits into QPSK complex symbols.
	3	16 QAM Modulator: Mapping of 4 bits into 16 QAM complex symbols.
30	4	Multiplexer (MUX): Multiplexes QPSK and 16 QAM symbols into a frame, as shown in Fig. 6.
35	5	Phase-Differential Encoder: The phases of subsequent symbols on the same subcarrier are differentially modulated, whereas the amplitude is kept unchanged (see functional block diagram of Fig. 4).

1	6	Null Symbol Generator: The unused subcarriers at the band edges are set to zero.
5	7	MUX: The data and null symbols are multiplexed into an OFDM symbol, where the subcarriers at the edges are equal to zero.
	8	IFFT: Inverse FFT is performed on N data samples to produce a baseband OFDM modulated signal.
10	9	Insertion of guard interval: A copy of the last N_G samples of the time domain OFDM symbol are inserted before each symbol in order to reduce the effect of multipath interference.
15	10	Quadrature Modulator: The input signal is used to modulate carriers having a 90° phase difference.
	11	Digital-to Analogue converter (D/A-converter).
20	12	Up-Converter: The signal is converted by a frequency converter to a given carrier frequency for transmission.
25	13	Radio Channel: The radio channels used for simulations are described further below in this chapter.

Receiver side (lower part of Fig. 1):

30	14	Down-Converter: The received signal is converted from the carrier frequency down to an intermediate frequency.
35	15	Analogue-to-Digital converter (A/D-converter).

1	16	Quadrature Demodulator: The OFDM signal is detected from the intermediate frequency and the baseband signal is generated.
5	17	Time Synchronization: A FFT window is generated indicating the effective symbol portion of the OFDM symbol for removing the guard interval.
10	18	FFT: Fast (discrete) Fourier Transformation is performed on the OFDM symbol to generate the complex frequency-domain symbols.
15	19	Demultiplexer (DEMUX): The input signal is demultiplexed into the useful data to be sent to a phase differential decoder 21 and the unused subcarriers at the band edges are removed in 20.
20	20	Delete unused subcarriers: The null symbols inserted by null symbol generator 6 at the transmitter are removed and deleted.
25	21	Phase Differential Decoder: The phases of subsequent symbols on the same subcarrier are differentially demodulated, whereas the amplitude is coherently processed (see block diagram implementation of Fig. 5).
30	22	DEMUX: According to the frame structure QPSK symbols are sent to a hardlimiter 23 and a running mean amplitude generation means 24 and the following QAM symbols are amplitude-corrected in 25.
35	23	Hardlimiter: The received QPSK symbols are hard-limited before demodulation.

- 1 **24** Running mean of amplitude: Since the amplitude of the QPSK symbols is definitely "1", the amount of amplitude distortion each subcarrier is determined from the QPSK signal, and supplied to block 25 for correction of the amplitude of the QAM symbols.
- 5
- 25** Correction of amplitude: The amplitude of the received QAM symbols is corrected by the factor calculated by block 24.
- 10
- 26** QPSK Demodulator: Demapping of QPSK complex symbols into corresponding bits.
- 27** 16 QAM Demodulator: Demapping of QAM complex symbols into corresponding bits.
- 15
- 28** MUX: Multiplexing of QPSK and QAM bits according to the adopted frame structure.
- 20 Two channel models have been considered for simulation: An additive white Gaussian noise channel (AWGN) and a frequency selective channel model proposed by ETSI (European Telecommunications Standards Institution) for the Universal Mobile Telecommunication System (UMTS). The latter is a Wide Sense Stationary Uncorrelated Scattering (WSSUS) channel model, that assumes that the received signal is represented by the sum of six delayed replicas of the input signal, weighted by independent zero-mean complex Gaussian time variant processes. The relative path loss and delay of each path for typical indoor environment is given in the Table 1 below:
- 25

Tap	Relative Delay (nsec)	Average Path Loss (dB)
1	0.0	0.0
2	50	-3.0
3	110	-10.0
4	170	-18.0
5	290	-26.0
6	310	-32.0

35

Table 1: Parameter of the multipath channel model used for simulations

- 1 On the receiver side the guard interval is first removed by windowing. The synchronization is not considered here. After the signal has been transformed into the frequency domain by FFT, the virtual carriers are extracted and the QAM demodulation is performed.

5

For the analysis the following system parameters have been used:

	FFT carrier size:	$N = 64$
	Guard length:	$N_G = 7$ samples
10	Useful time:	$N_{\text{used}} = 64$ samples
	Symbol time:	$N_{\text{Sym}} = 71$ samples
	Selected carriers:	$N_{\text{sel}} = 56$
	Sampling frequency:	$B = 30$ MHz

15 Chapter II: Coherent Modulation

- As mentioned above, in the case of coherent modulation pilot symbols should be inserted to help channel estimation in the receiver. Normally, each frame contains a number of pilot symbols on different subcarriers. In the receiver the amount of distortion of the pilot subcarriers is interpolated in the time and frequency domains, in order to estimate the channel response over the frequency band of interest.

- To simplify simulations it was assumed that one OFDM symbol with all subcarriers set to a known value ($I = 1, Q = 0$) is sent at the beginning of each frame. On the receiver side that OFDM symbol is first filtered using a complex FIR filter, in order to shorten the effect of additive white Gaussian noise. It is then used as a measure of channel distortion and the following data symbols are correlated by equivalent factors. The simulation results over AWGN and UMTS channels are shown in Fig. 2:

- Curve "a" shows an ideal demodulation condition for AWGN. Curve "b" visualizes the coherent demodulation of 16 QAM signals over an AWGN channel causing a SNR degradation of about 1dB at a BER of $10E-3$. This is due to the fact that the channel estimation factor for every subcarrier is gained from a noisy pilot symbol in spite of FIR filtering. Further SNR degradation of about 2,5 dB is observed, when a multipath channel UMTS is assumed (curve "c").

- 1 These results can be improved by averaging the channel estimation factors over several frames, thus the effect of additive white Gaussian noise can be further shortened.

5 **Chapter III: Quasi-Differential Modulation according to the Invention.**

- The reason why quadrature amplitude modulated (QAM) signals can not be differentially processed as with DQPSK is the multi-amplitude constellation of QAM signals. The result would be endless many amplitude levels after a few symbols have been differentially modulated. This is, however, an undesired property that complicates the implementation.

- Thus the idea of the invention is the separate handling of amplitude and phase of QAM signals. If only the phase of 16 QAM symbols are differentially modulated while keeping their original amplitudes, there would be endless many phase levels at three amplitudes (see Fig. 3). Of course, this is less bothersome than it is the case with many amplitude levels.

- As shown in Fig. 4 and Fig. 5 the phases of subsequent symbols φ_k and $\phi_k - N$, respectively on the same subcarrier are differentially modulated and demodulated, whereas the amplitude A_k is coherently processed.

- The phase rotation on every subcarrier is no more relevant. Preferably and in accordance with the invention the amplitude distortion of the QAM signal due to frequency selectivity of the channel is separately corrected. The information about the correcting factor for every subcarrier is preferably taken from the QAM symbols whose phase is unique to them. This is the case for all symbols not located at the diagonals of the Q/I diagram. In particular, this is the case for 8 of the 16 symbols as shown in the constellation diagram of Fig. 10D.
- Constellation diagrams for QPSK and 16 QAM symbols at different stages with an assumed SNR of 35 dB are depicted in Fig. 10A to 10F with the respective signal characterization indicated in the respective headline.

- The correcting factors for the amplitude can be easier computed when a combined QPSK/16 QAM system is adopted. Often, wireless broadband systems adopt QPSK modulation of control data, for better robustness in frequency selective channels, and 16 QAM or higher modulation for useful

1 data. In the system used for simulation, the frame structure of Fig. 6 has been
 adopted comprising 200 OFDM symbols in the QPSK modulated control signal
 and 4800 OFDM symbols in the 16 QAM modulated data signal, i.e., one frame
 contains 5000 OFDM symbols.

5

Since QPSK symbols have definitely the amplitude "1", and the channel is
 supposed to be static during one frame, the amount of amplitude distortion of
 the QPSK signal can be easily determined and used for correction of the QAM
 signal.

10

Furthermore, a running mean of the amplitude correcting factor can be per-
 formed during the QPSK transmission, in order to shorten the effect of additive
 white Gaussian noise.

15 If only 16 QAM signals are available, a running mean of the correcting factors
 can also be performed over a time window, where the channel is supposed to
 be static.

Quasi-differential demodulation in an AWGN channel causes a SNR degradation
 20 of about 5.5 dB at a BER of 10^{-3} ; see Fig. 7, curve "f" - compared to curve "d"
 referring to an ideal AWGN channel. The BER performance over a multipath
 channel UMTS is identical with that over an AWGN channel as visualized by
 curve "e" in Fig. 7. This denotes, that the multipath effect is fully shortened
 with the quasi-differential demodulation technique according to the invention.
 25 The benefit of this new technique is therefore major in frequency-selective ra-
 dio channels.

Chapter IV: Comparison of BER performance

30 The BER results of both techniques are depicted in Fig. 8 for AWGN and in Fig.
 9 for the multipath channel.

Fig. 8 teaches that coherent modulation technique with channel estimation
 performs considerably better than the quasi-differential modulation over the
 35 AWGN channel. Curve "h" for the coherent modulation comes close to the ideal
 curve "g" by approximately 1 dB, whereas curve "j" for the quasi-differential
 technique shows a smaller decrease of BER as SNR increases.

- 1 However, the excellent performance of the 16 QAM quasi-differential modulation technique according to the invention becomes obvious when considering the multipath channel situation shown in Fig. 9. Curve "k" again shows for comparison the ideal situation for AWGN. The SNR degradation of curve "m"
- 5 depicting the BER performance for quasi-differential demodulation according to the invention compared to the coherent demodulation of curve "e" is most at a BER of $10E-3$, and amounts to only 2 dB. For higher and lower BERs the degradation becomes constantly smaller.

10 Chapter V: Summary

A novel incoherent demodulation technique for QAM signals has been presented. The BER performance of this technique has been analyzed and compared to the coherent one.

- 15 It can be concluded that the advantage of the coherent demodulation is the SNR gain of maximum 2 dB at a BER of $10E-3$. However, this can be further minimized when the additional overhead for channel estimation is used for higher coding of the quasi-differential modulated signal.

- 20 Furthermore, when considering the implementation aspects of both techniques compared here, it should be noticed that the differential technique according to the invention is less complex since the frequency synchronization of differential demodulated signals is easier. In particular, complex equalizers to
- 25 perform channel estimation are no more needed as for coherent systems. Also, no pilot subcarriers are needed and thus the bandwidth efficiency is much higher.

30

35

Claims

- 1 **1.** A modulation/demodulation method for multi-amplitude digital modulated signals with non-equidistant phases transmitted via an orthogonal frequency division multiplexing (OFDM) communication system **characterized in that** the amplitude of said signals are separately and coherently processed,
- 5 whereas the phases of respectively subsequent symbols on a same subcarrier are differentially modulated and demodulated, respectively.
- 2.** The method of claim 1, **characterized in that** said amplitudes are coherently transmitted and are corrected in the receiver.
- 10 **3.** The method of claim 2, **characterized in that** at the demodulation stage the amplitude distortions of said multi-amplitude digital modulated signals due to frequency selectivity of the respective channel are separately corrected on each subcarrier.
- 15 **4.** The method according to at least one of the preceding claims, **characterized in that** said multi-amplitude digital modulated signals are quadrature amplitude modulated (QAM) signals.
- 20 **5.** The method according to claim 4, **characterized in that** the correction factor for every subcarrier is determined from those QAM symbols whose phase is unique to them.
- 6.** The method of claim 4, **characterized in that** the correction factors for
- 25 the subcarrier amplitudes of said QAM symbols are computed from quadrature phase shift keying (QPSK) signals combined in one respective frame of a plurality of OFDM symbols comprising a defined number of QAM data symbols and a defined number of QPSK control signals.
- 30 **7.** The method according to claim 4, **characterized in that** sixteen QAM symbols are adopted as said QAM signals.
- 8.** The method of claim 7, **characterized in that** for amplitude correction of the receiver, a running mean of the correction factor is performed over a defined time window.

1 **9.** The method of claim 4, **characterized in that** a frame structure is adopted comprising n QPSK symbols followed by m 16 QAM symbols.

5 **10.** An orthogonal frequency division multiplexing (OFDM) system for transmission of a multi-amplitude digital modulated signal from a transmitter to a receiver via a radio channel **characterized in that**

- on the transmitter side, phase differential encoder means (5) are provided for differentially modulating subsequent symbols on the same subcarrier,

10 - on the receiver side, differential phase decoding means (21) are provided for demodulating said respectively subsequent symbols on said same subcarrier, and in that

- means are provided on said both sides for coherent processing of the amplitudes of said signals.

15 **11.** The OFDM system of claim 10, **characterized in that** said transmitter is adapted to process a coded data stream with a block frame structure consisting in each frame of a sequence of n quadrature phase shift keyed (QPSK) control symbols followed by m sixteen quadrature amplitude modulated (16 QAM) data symbols and comprising

- a demultiplexer means (1) for separating said control symbols and said data symbols, and

- for feeding said control signals to QPSK modulator means (2) for mapping of two bits each into QPSK complex symbols and for supplying said data symbols to a 16 QAM modulator means (3) for mapping of four bits each into 16 QAM complex symbols,

- first multiplexing means (4) for multiplexing said QPSK complex symbols and said 16 QAM complex symbols and for supplying the resulting data stream to

30 - a phase differential encoder means (5) for differential modulation of the phases of respectively subsequent symbols on a same subcarrier and keeping the respective amplitudes of said symbols unchanged,

- second multiplexing means (7) for transferring the resulting data symbol stream into OFDM signals that are subject to an inverse fast Fourier transformation (8) to produce a baseband OFDM-modulated signal,

35 - quadrature modulator means (10) for modulating said baseband signal with carriers having 90° phase difference and supplying the thus modulated

1 signal to

- D/A-converter means (11) followed by an up-converter means (11) to hook the analog D/A-converter output signal to a given carrier frequency for transmission.

5

12. The OFDM system of claim 11, **characterized in that** null symbol generating means (6) are provided for setting unused subcarriers leaving said phase differential encoder means (5) at the band edges to zero.

10 **13.** The OFDM system of claim 11 or 12, **characterized in that** for reducing multipath interference effects a guard interval inserting means (9) is provided for inserting before each symbol a copy of a defined number of the last samples of the inverse fast Fourier transformed time domain OFDM symbols.

15 **14.** The OFDM system of any of the preceding claims 10 to 13, **characterized in that** said receiver is adapted to receive, process and demodulate said radio channel transmitted signal and comprising:

- a down-converter means (14) for converting the received signal from said carrier frequency down to an intermediate frequency;

20 - analogue-to-digital converter means for digitizing said intermediate frequency signal;

- a quadrature demodulator means (16) for detecting and generating a baseband signal from said A/D-converted intermediate frequency;

- a time synchronizing means (17) for generating a window for fast
25 Fourier transformation indicating the effective symbol portion of the OFDM signal;

- fast discrete Fourier transformation means (18) for producing complex frequency domain symbols of said effective symbol portion of the OFDM signal;

- first demultiplexer means (19) for demultiplexing the FFT transformed
30 OFDM signal into useful data and for cancelling unused subcarriers at the band edges;

- phase differential decoder means (21) for demodulating the phases of subsequent symbols on the same subcarrier with simultaneous coherent processing of the amplitudes;

35 - second demultiplexer means (22) for separating QPSK symbols and QAM symbols;

- QPSK demodulator means (26) for demapping of said QPSK complex

- 1 symbols into corresponding bits;
- QAM demodulator means (27) for demapping of said QAM complex symbols into corresponding bits; and
 - third multiplexing means (28) for multiplexing of said demodulated
- 5 QPSK bits and said demodulated QAM bits according to the adopted frame structure.

15 **15.** The OFDM system of claim 14, **characterized in that** the QPSK complex symbols output from said second demultiplexer means (22), on the one hand, are sent via hardlimiter means (23) to said QPSK demodulator means (26) and, on the other hand are sent to an amplitude distortion determining mean for generating a running mean of the respective QPSK signal, and in that the QAM complex symbols output by said second demultiplexer means (22) is supplied to an amplitude correction means (25) for amplitude correction according to the respective running mean of amplitude before supplying the amplitude corrected QAM complex symbols to said QAM demodulator means (27).

20

25

30

35

Abstract**Quasi-Differential Modulation/Demodulation Method for
Multi-Amplitude Digital Modulated Signals and OFDM System**

The invention proposes the separate processing of the phase and amplitude of multi-amplitude digital modulation techniques, such as a QAM. The phases are differentially modulated and the amplitudes coherently processed. Also proposed is a method to correct the amplitude distortion of the symbols on each subcarrier, either from the QAM signal itself or from any PSK signal, if available. The invention shows that differential modulation/demodulation of multi-amplitude signals with no equidistant phases such as QAM is possible. Complex equalizer means to perform a channel estimation is no more needed as for coherent systems. Further, no pilot subcarriers are needed, thus the bandwidth efficiency is much higher. Furthermore, the frequency synchronization of differential demodulated signals is less complex. An implementation proposal of the new modulation/demodulation technique is described.

(Fig. 1)

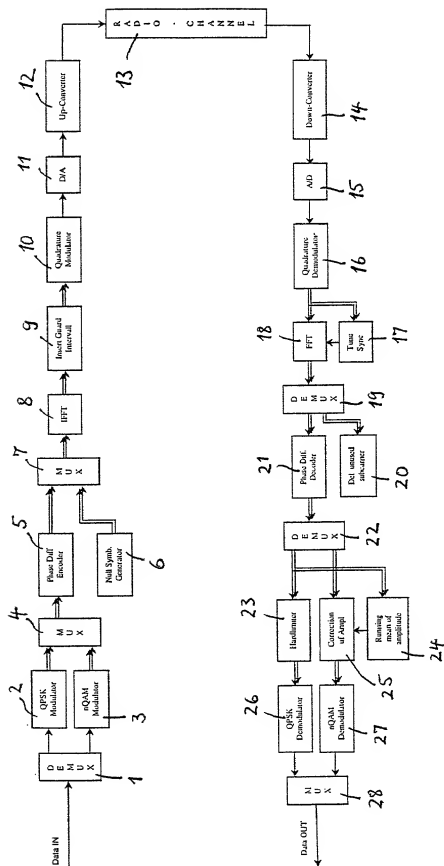


Fig. 1

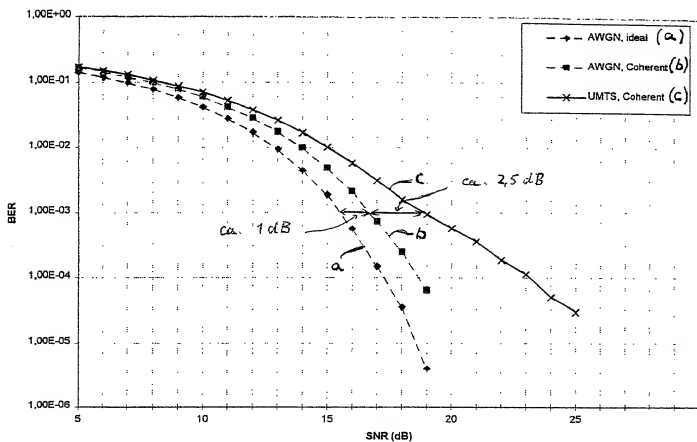


Fig. 2

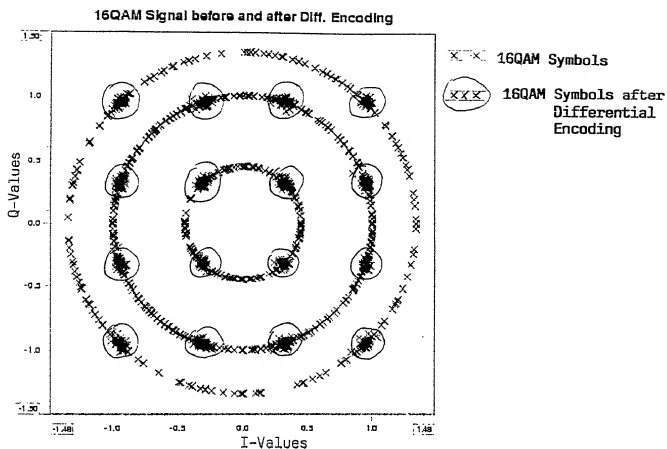


Fig. 3




Fig. 6

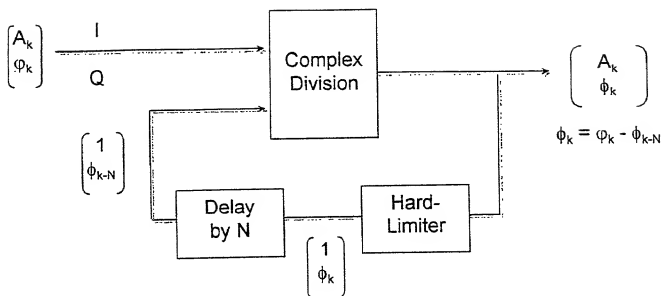


Fig. 4

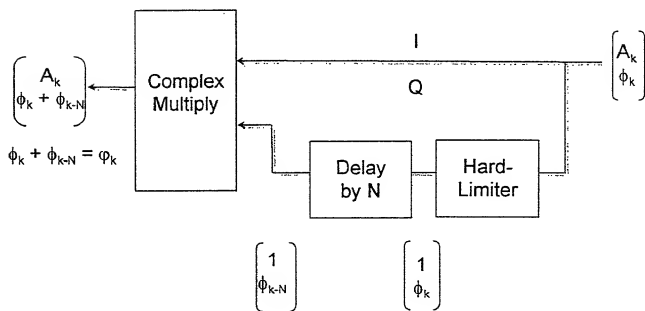


Fig. 5

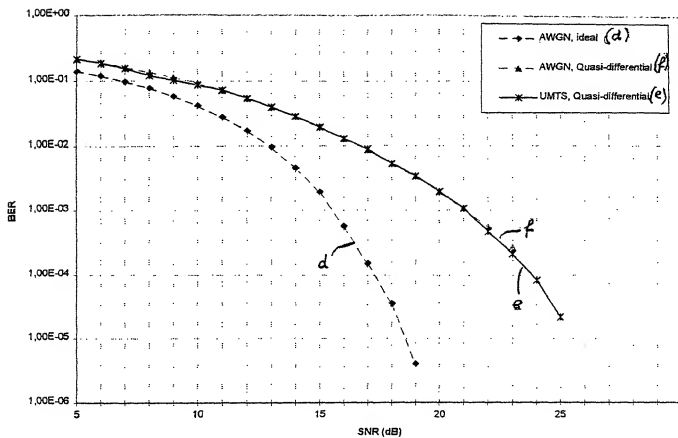


Fig. 7

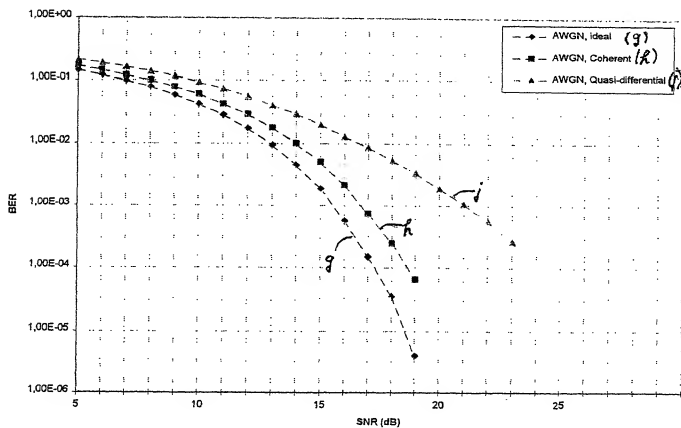


Fig. 8

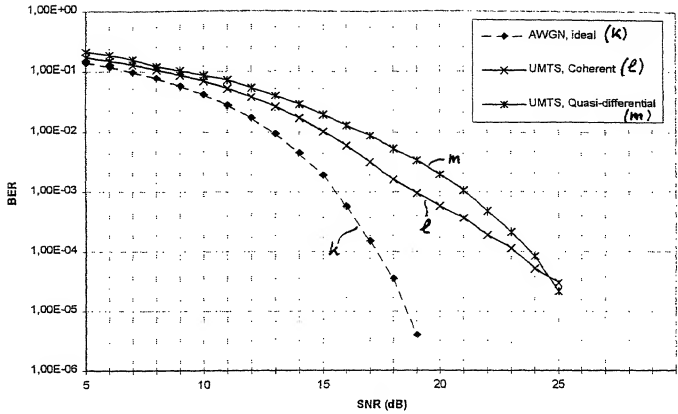


Fig. 9

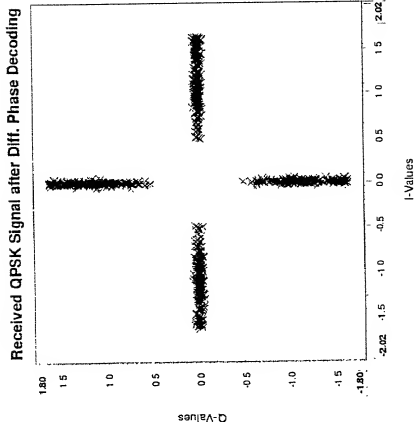


Fig. 10C

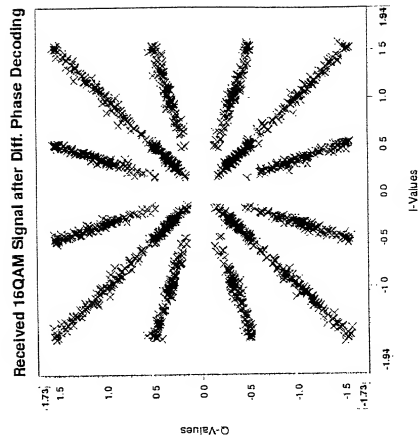


Fig. 10D

Received QPSK Signal after Hardlimiter

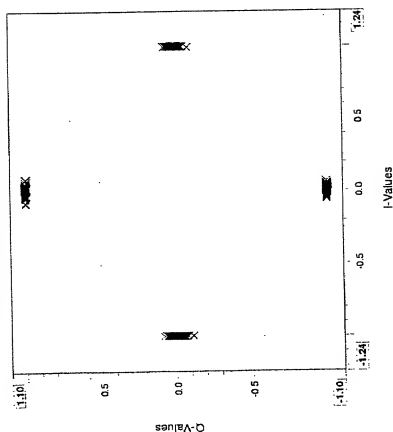


Fig. 10E

Received 16QAM Signal after amplitude correction

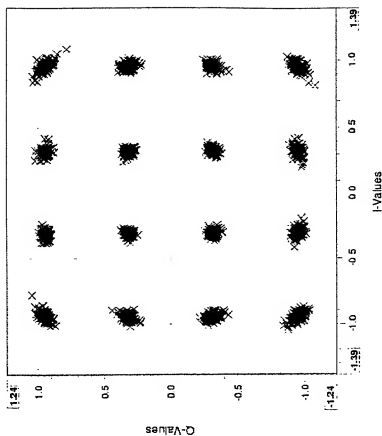


Fig. 10F

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)

(Under 37 CFR § 1.63; with Power of Attorney)

FROMMER LAWRENCE & HAUG LLP

FLH File No. 450117-02372

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

QUASI-DIFFERENTIAL MODULATION/DEMODULATION METHOD FOR MULTI-AMPLITUDE DIGITAL MODULATED SIGNALS AND OFDM SYSTEM

the specification of which

 X is attached hereto.

 was filed on as Application Serial No. ,

with amendment(s) through (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>	<u>(List additional applications on separate page):</u>	<u>Priority Claimed:</u>
<u>Number:</u>	<u>Country:</u>	<u>Filed (Day/Month/Year):</u>
99100737.8	Europe	15 January 1999
		<u>Yes</u> <u>No</u>
		<u> X </u>

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s) (List additional applications on separate page):

<u>Appl. Ser. Number:</u>	<u>Filed (Day/Month/Year):</u>	<u>Status (patented, pending, abandoned):</u>
<u> </u>	<u> </u>	<u> </u>

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Direct all telephone calls to:
(212) 588-0800
to the attention of:
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature: Date:

Full name of sole or first inventor: Besma KRAIEM
Residence: Fellbach, Germany
Citizenship: Tunisian

Signature: Date:

Full name of 2nd joint inventor (if any):
Residence:
Citizenship:

Signature: Date:

Full name of 3rd joint inventor (if any):
Residence:
Citizenship:

[Similarly list additional inventors on separate page]

Post Office Address(es) of inventor(s):

[if all inventors have the same post office address]

SONY International (Europe) GmbH
Hugo-Eckener-Strasse 20
D-50829 Köln
GERMANY

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, Individual Non-Inventor].

Note: A post office address must be provided for each inventor.